

# KR AUDIO ELECTRONICS HI VACUUM TUBE

## KR 2A3

### General data

Filament specifications:	Voltage	2.5 V
	Current	2.5 A

Amplification Factor 3.8

---

### Power Amplifier class A1


#### Maximum

DC Plate Voltage	300 V
DC Plate Current	100 mA
Dissipation	20 W

---

DC Plate Voltage	250 V
DC Plate Current	70 mA
Grid Voltage	-45 V
Plate Resistance	750 ohm
Transconductance	5.2 mA/V

### CONNECTION OF THE VALVE BASE 2A3

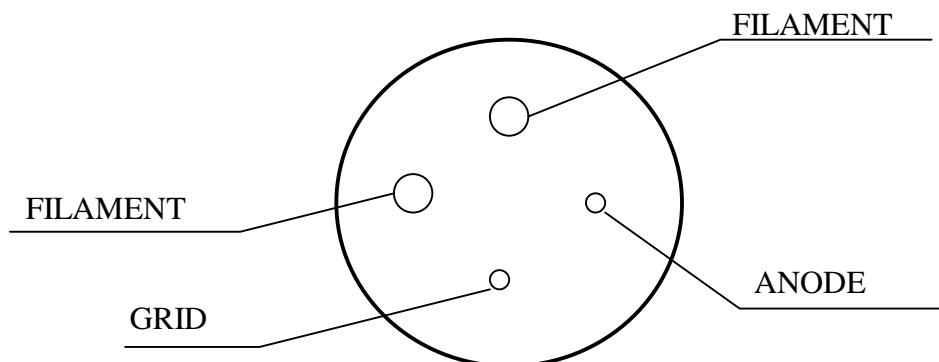

VIEW FROM BELOW

# Plate characteristics 2A3

