

KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 300B

General data

Filament specifications:	DC/AC Voltage	5 V
	DC/AC Current	1.2 A

Amplification Factor	3.9
----------------------	-----


Power Amplifier class A1

Maximum

DC Plate Voltage	550 V
Dissipation	50 W
DC Plate Current	120 mA


DC Plate Voltage	450 V
DC Plate Current	100 mA
Grid Voltage	-90 V
Plate Resistance	630 ohm
Transconductance	6,2 mA/V


CONNECTION OF THE VALVE BASE KR300B

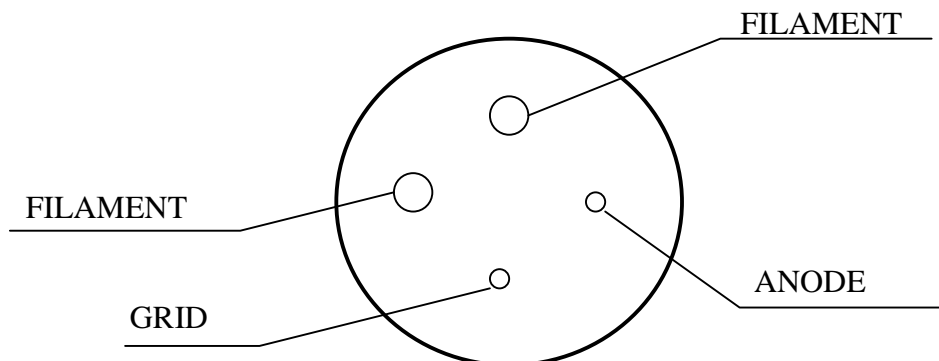

VIEW FROM BELOW

Plate characteristics KR300B

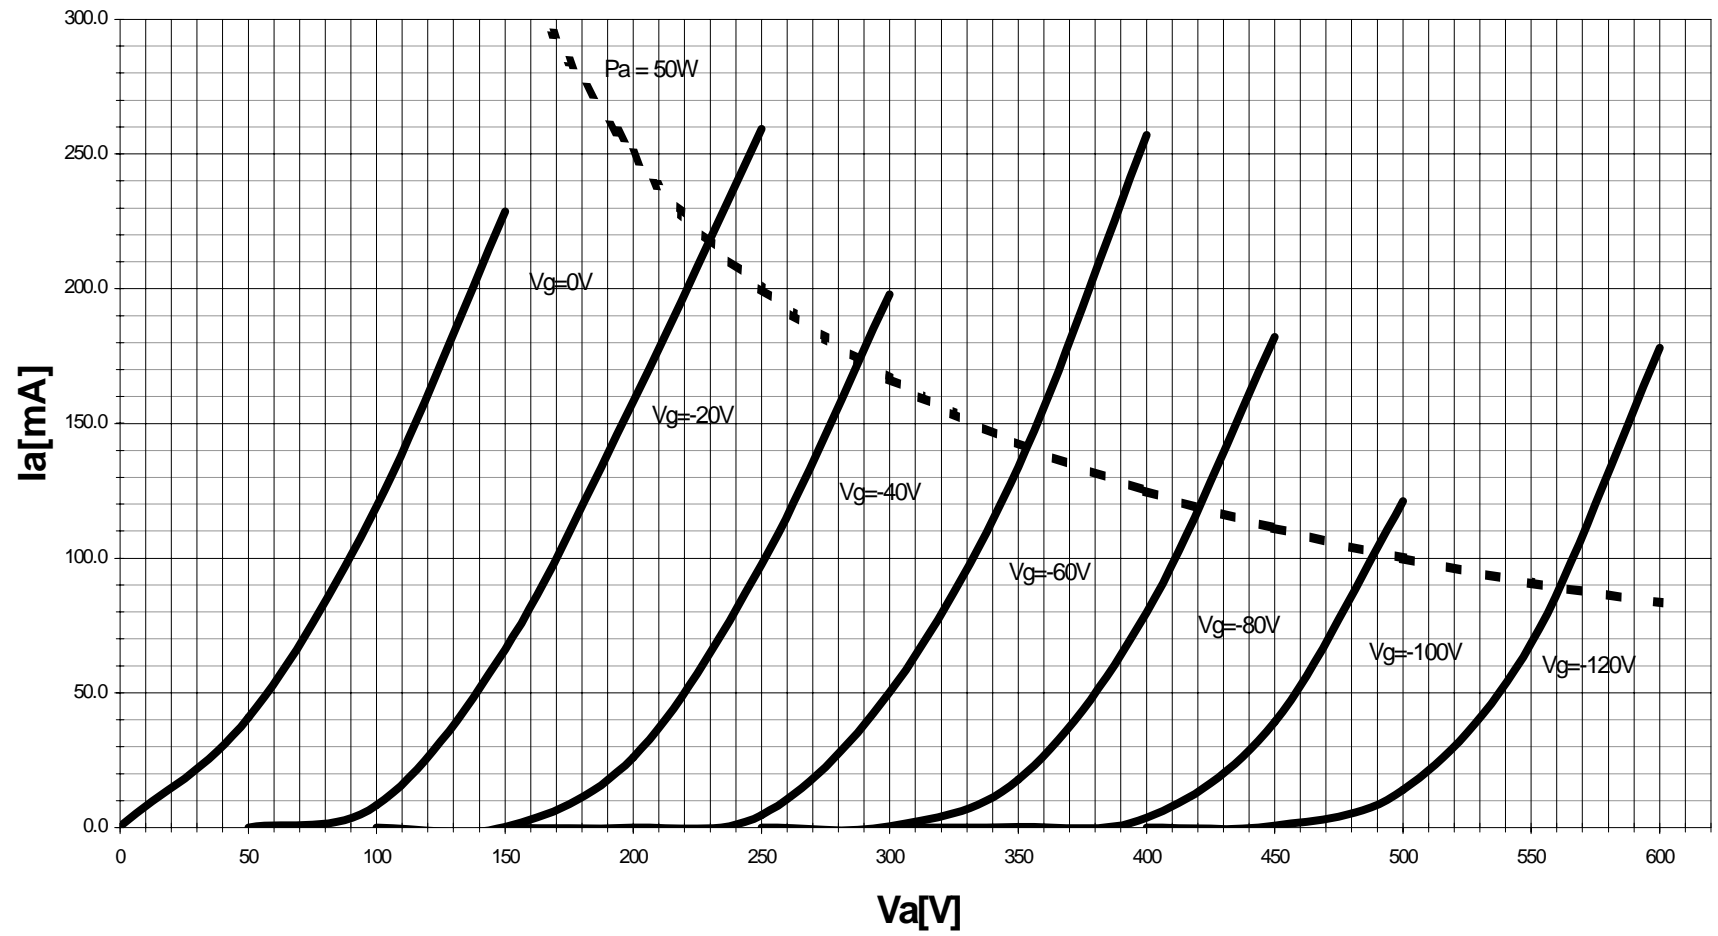

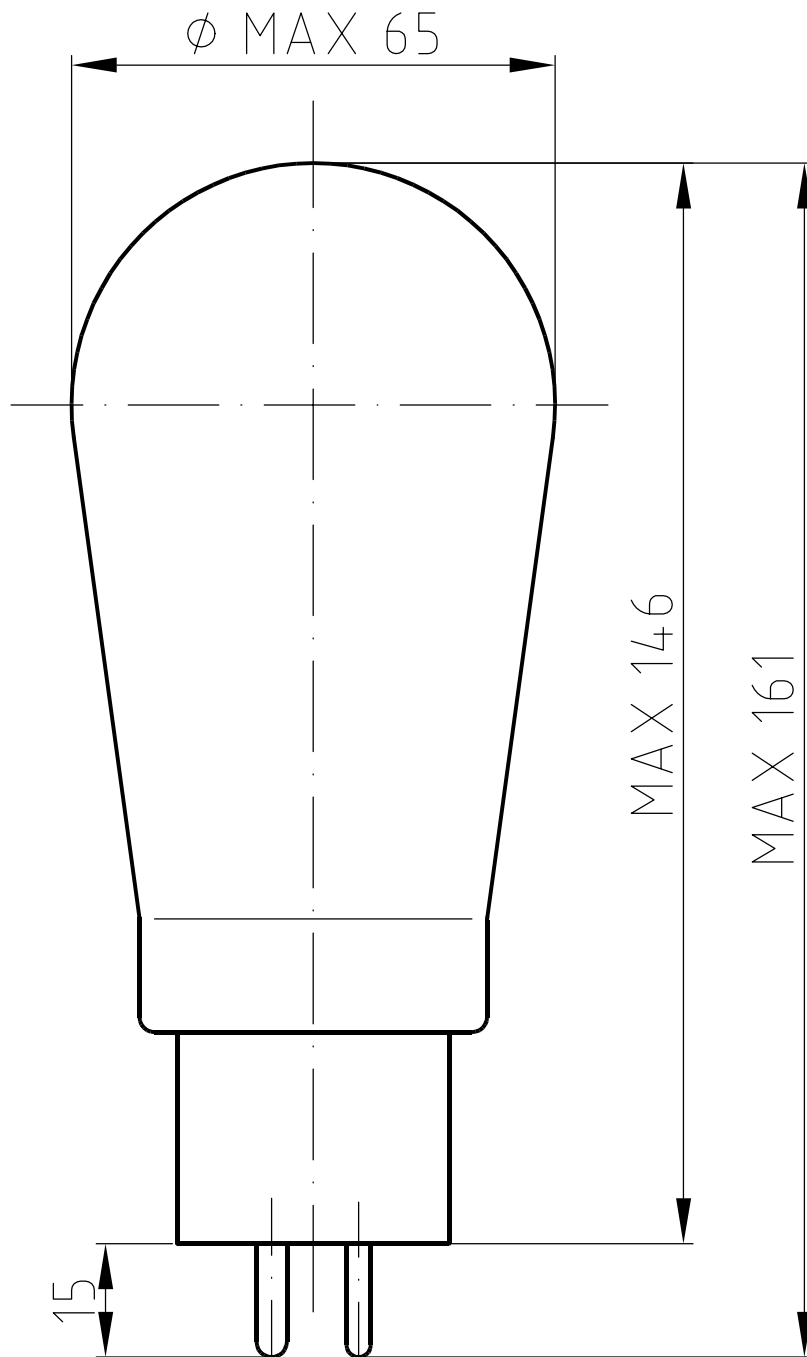

KR 300B
Balloon