

KR AUDIO ELECTRONICS HI VACUUM TUBE

TM

General data


Filament specifications:	DC Voltage	4 V
	DC Current	0,7 A

Maximum

DC Plate Voltage	180 V
Dissipation	0,25 W
DC Plate Current	2 mA

DC Plate Voltage	60 - 120 V
Grid Voltage	- 0,5 V
Transconductance	0,3 mA/V
Grid Current	< 2 uA

CONNECTION OF THE VALVE BASE UF4

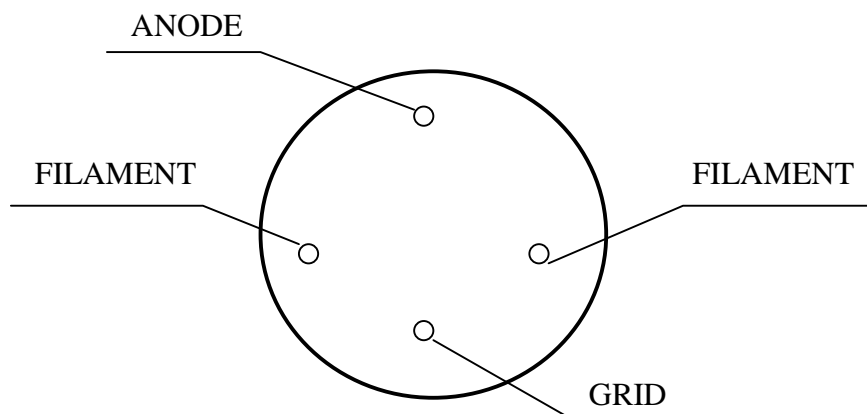

VIEW FROM BELOW

Plate Characteristics TM

